


Product Features / 產品特性

Fuse 對應保險絲	14x51 mm Cylindrical Fuse
Terminal Rating 端子強度	Solid, Stranded, Fine Stranded, Spade Lug, Comb Bus Bar ; Single and Dual Wire ; 75°C and 90°C Cu wire
Voltage & Current 最大電壓電流	1500VDC, 30A max
SCCR Rating 短路電流等級	UL 10KA / 1500VDC
Wire Range 線徑	AWG14 to AWG4
Flammability Ratings 防火等級	UL 94-V0
Storage & Operating Temperature Range 儲存與操作溫度範圍	-20°C to +120°C (It's not recommended, but the holder will work well under -40°C without damage)



Dimensions / 尺寸圖 (Unit / 單位:mm)

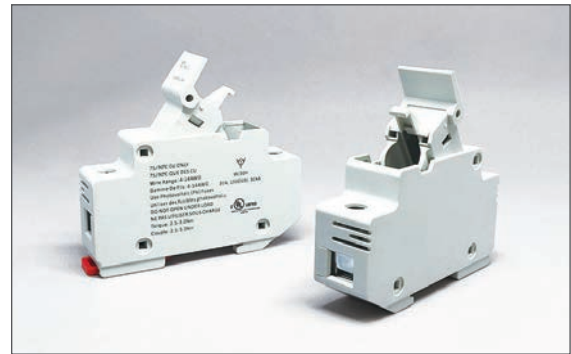