

I-T Characteristics / 時間-電流特性

Rated Current 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
5A~100A	300%	0.2s Min. / 最短0.2秒
		30s Max. / 最長30秒
	500%	0.1s Min. / 最短0.1秒
		10s Max. / 最長10秒




Product Features / 產品特性


Operating Temperature 操作溫度	<p>Operating temperature / 操作溫度範圍: -55°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍, 在選用保險絲規格時, 需考慮操作環境溫度對保險絲的影響。</p>
Storage Conditions 儲存條件	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
Installation Way & Parameters 安裝方式及條件	Stud-mount / 螺絲安裝
	<p>Wave soldering parameters / 波峰焊 Solder pot temperature / 錫爐溫度: 260±3°C Max Solder dwell time / 焊接時間: 10s Max</p>
	<p>Hand welding parameters / 手工焊 Solder iron temperature / 烙鐵溫度: 350±5°C Heating time / 焊接時間: 5s Max</p>

Dimensions / 尺寸圖 (Unit / 單位:mm)

WH40-XXX-M6

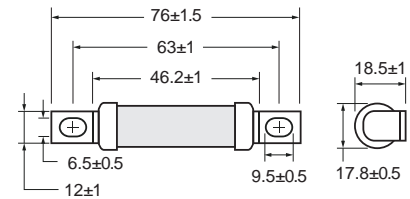

WH40-XXX-M8

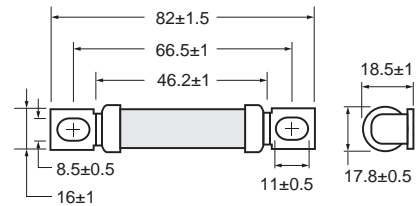

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WH40	WH40-XXX-M6	WH40-XXX-M8		700VDC / 10KA	
	WH40-5-M6	WH40-5-M8	5A		
	WH40-8-M6	WH40-8-M8	8A		
	WH40-10-M6	WH40-10-M8	10A		
	WH40-15-M6	WH40-15-M8	15A		
	WH40-20-M6	WH40-20-M8	20A		
	WH40-25-M6	WH40-25-M8	25A		
	WH40-32-M6	WH40-32-M8	32A		
	WH40-40-M6	WH40-40-M8	40A		
	WH40-50-M6	WH40-50-M8	50A		
	WH40-60-M6	WH40-60-M8	60A		
	WH40-80-M6	WH40-80-M8	80A		
	WH40-100-M6	WH40-100-M8	100A		