



Product Features / 產品特性

Operating Temperature 操作溫度	Operating temperature / 操作溫度範圍：-55°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。
Storage Conditions 儲存條件	Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。
Installation Way & Parameters 安裝方式及條件	Stud-mount / 螺柱安裝
	Wave soldering parameters / 波峰焊 Solder pot temperature / 錫爐溫度：260±3°C Max Solder dwell time / 焊接時間：10s Max
	Hand welding parameters / 手工焊 Solder iron temperature / 烙鐵溫度：350±5°C Heating time / 焊接時間：5s Max

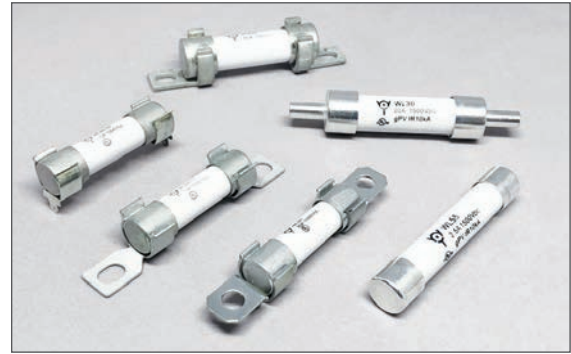


Dimensions / 尺寸圖 (Unit / 單位:mm)


WL55-XXX



WL55P-XXX-AP

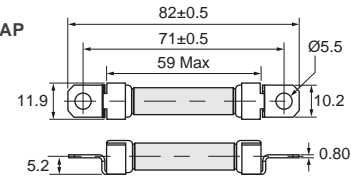

WL55P-XXX-I



For 10-12AWG (6-4mm²); Recommended Crimping Tool: T&B Sta-Kon ERG4002 or equivalent

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WL55 WL55P	WL55-XXX	WL55P-XXX-AP (-I)			cUL _{US}
	WL55-2.5	WL55P-2.5-AP (-I)	2.5A	1500VDC / 10KA 1500VDC / 20KA	●
	WL55-3	WL55P-3-AP (-I)	3A		●
	WL55-3.5	WL55P-3.5-AP (-I)	3.5A		●
	WL55-4	WL55P-4-AP (-I)	4A		●
WL55-6	WL55P-6-AP (-I)	6A	●		