


I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
10A-25A	200%	5 min Max. / 最長5分鐘
30A		-
10A-25A	250%	-
30A		2 min Max. / 最長2分鐘
10A-25A	300%	10s Max. / 最長10秒
30A		-

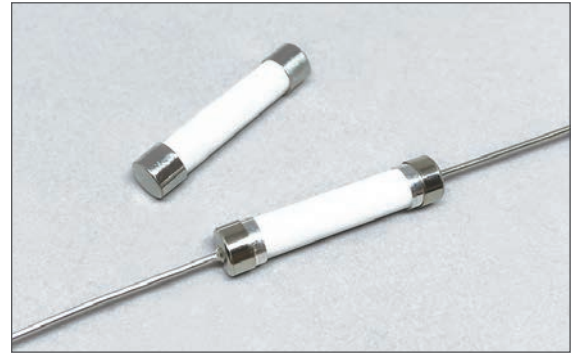


Product Features / 產品特性


<b>Operating Temperature 操作溫度</b>	<p>Operating temperature / 操作溫度範圍: -50°C~125°C</p> <p>When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses.</p> <p>若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。</p>
<b>Storage Conditions 儲存條件</b>	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years.</p> <p>在溫度+10°C~60°C、相對濕度≤75%的密封條件下可存放3年。</p> <p>Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days.</p> <p>在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
<b>Installation Way &amp; Parameters 安裝方式及條件</b>	<p>Wave soldering parameters / 波峰焊</p> <p>Solder pot temperature / 錫爐溫度: 260±3°C Max</p> <p>Solder dwell time / 焊接時間: 10s Max</p> <hr/> <p>Hand welding parameters / 手工焊</p> <p>Solder iron temperature / 烙鐵溫度: 350±5°C</p> <p>Heating time / 焊接時間: 5s Max</p>

Dimensions / 尺寸圖 (Unit / 單位:mm)


WM45-XXX




WM45-XXX-P

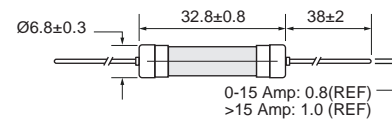

WM45-XXX-P-L

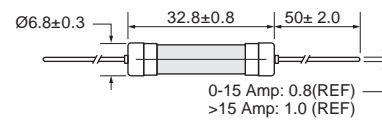

WM45-XXX-P-SXL

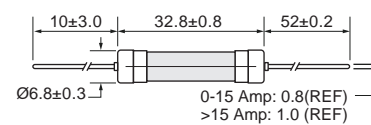

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WM45	WM45-XXX	WM45-XXX-P (-P-L / -P-SXL)			
	WM45-10	WM45-10-P (-P-L / -P-SXL)	10A	500VAC / 1000A 500VDC / 1000A	●
	WM45-12	WM45-12-P (-P-L / -P-SXL)	12A		●
	WM45-15	WM45-15-P (-P-L / -P-SXL)	15A		●
	WM45-16	WM45-16-P (-P-L / -P-SXL)	16A		●
	WM45-20	WM45-20-P (-P-L / -P-SXL)	20A		●
	WM45-25	WM45-25-P (-P-L / -P-SXL)	25A		●
WM45-30	WM45-30-P (-P-L / -P-SXL)	30A	●		