

I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
5A~25A	100%	4 Hrs Min. / 最短4小時
30A~50A		4 Hrs Min. / 最短4小時
5A~25A	150%	1 Hrs Max. / 最長1小時
30A~50A		-
5A~25A	200%	120s Max. / 最長120秒
30A~50A		120s Max. / 最長120秒




Product Features / 產品特性


Operating Temperature 操作溫度	Operating temperature / 操作溫度範圍: -55°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。
Storage Conditions 儲存條件	Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。
Installation Way & Parameters 安裝方式及條件	Wave soldering parameters / 波峰焊 Solder pot temperature / 錫爐溫度: 260±3°C Max Solder dwell time / 焊接時間: 10s Max Hand welding parameters / 手工焊 Solder iron temperature / 烙鐵溫度: 350±5°C Heating time / 焊接時間: 5s Max

Dimensions / 尺寸圖 (Unit / 單位:mm)

WM70-XXX



WM70-XXX-P

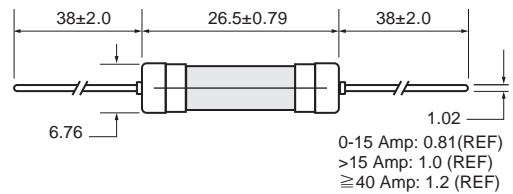

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WM70	WM70-XXX	WM70-XXX-P		75VDC / 2500A	
	WM70-5	WM70-5-P	5A		
	WM70-6	WM70-6-P	6A		
	WM70-10	WM70-10-P	10A		
	WM70-15	WM70-15-P	15A		
	WM70-20	WM70-20-P	20A		
	WM70-25	WM70-25-P	25A		
	WM70-30-ZG	WM70-30-ZG-P	30A		
	WM70-40-ZG	WM70-40-ZG-P	40A		
WM70-50-ZG	WM70-50-ZG-P	50A			