


## Thermal Cutoff Fuses

TE Series / Rating 10A 250V AC TG Series / Rating 15A 250V AC



### Dimensions / 尺寸图 (Unit / 单位:mm)

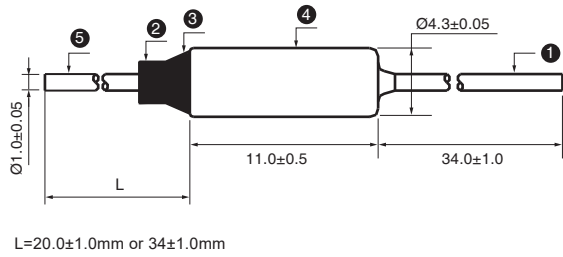

### TE Series Rating 10A 250V AC



No.	Component / 元件	Material / 材质
①	Lead 1 / 引线1	Tinned Copper Wire / 镀锡铜线
②	Isolation Tube / 绝缘管	Ceramic / 陶瓷
③	Sealing Resin / 封口树脂	Epoxy Resin / 环氧树脂
④	Casing / 外壳	Silver-Plated Copper / 铜镀银
⑤	Lead 2 / 引线2	Silver-Plated Copper / 铜镀银

### TG Series Rating 15A 250V AC



### Electrical Characteristics / 电气特性

Type 型号	(A) Rated Functioning Temperature 额定动作温度 (T <sub>F</sub> , T <sub>i</sub> ) (°C)	(B) Cut-Off Temperature 实测动作温度 (°C)	(C) Holding Temperature Limit 最高维持温度 (T <sub>H</sub> , T <sub>h</sub> , T <sub>c</sub> ) (°C)	(D) Maximum Temperature Limit 最高极限温度 (T <sub>M</sub> , T <sub>m</sub> ) (°C)	Electrical Rating 电气额定值 Voltage(V)/额定电压 (V <sub>AC</sub> )	Safety Approvals 安全认证				
						UL <sup>®</sup> US	DVE	S	CCC	PSE JET
TE/TG 66	66	64±2	42	200	250V	●				●
TE/TG 77	77	74±2	48	200	250V	●	●	●	●	●
TE/TG 87	87	81±2	52	200	250V	●	●	●	●	●
TE/TG 94	94	91±2	62	160	250V	●	●	●	●	●
TE/TG 99	99	96±2	68	200	250V	●	●	●	●	●
TE/TG 103	103	97±2.5	68	200	250V	●	●	●	●	●
TE/TG 113	113	108±2	81	200	250V	●	●	●	●	●
TE/TG 116	116	111±2.5	83	200	250V	●	●	●	●	●
TE/TG 121	121	118.5±2.5	86	200	250V	●	●	●	●	●
TE/TG 128	128	126±2	100	250	250V	●	●	●	●	●
TE/TG 139	139	135±2	109	200	250V	●	●	●	●	●
TE/TG 142	142	135±2	110	200	250V	●	●	●	●	●
TE/TG 147	147	142±2	117	250	250V	●	●	●	●	●
TE/TG 152	152	150±2	122	250	250V	●	●	●	●	●
TE/TG 169	169	164±2	139	300	250V	●	●	●	●	
TE/TG 184	184	181.5±2	154	300	250V	●	●	●	●	
TE 185	185	181.5±2	154	300	250V	●				
TE/TG 187	187	181.5±2	154	300	250V	●				
TE 216	216	213±2	186	300	250V	●	●	●	●	●
TG 216	216	213±2	186	300	250V		●	●	●	●
TE/TG 240	240	236±2	200	300	250V	●	●	●	●	