



Product Features / 產品特性

<p><b>Operating Temperature</b> 操作溫度</p>	<p>Operating temperature / 操作溫度範圍：-55°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。</p>
<p><b>Storage Conditions</b> 儲存條件</p>	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
<p><b>Installation Way &amp; Parameters</b> 安裝方式及條件</p>	<p>Stud-mount / 螺栓安裝</p> <p>Wave soldering parameters / 波峰焊 Solder pot temperature / 錫爐溫度：260±3°C Max Solder dwell time / 焊接時間：10s Max</p> <p>Hand welding parameters / 手工焊 Solder iron temperature / 烙鐵溫度：350±5°C Heating time / 焊接時間：5s Max</p>

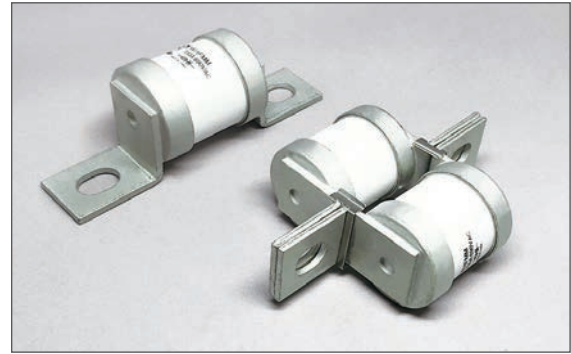

Dimensions / 尺寸圖 (Unit / 單位:mm)

WHFMM-XXX

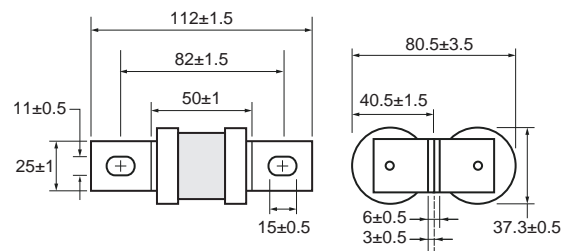

Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號	Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WHFMM	<b>WHFMM-XXX</b>			
	WHFMM-500	500A	690VAC / 50KA	●
	WHFMM-700	700A	500VDC / 10KA	●